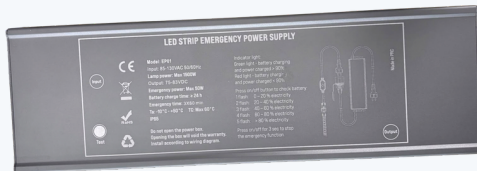


Ropelight emergency **battery pack**

Power cut? Your ropelight stays on.

When the mains supply fails, the emergency function keeps your ropelight lit for up to 180 minutes at reduced brightness. Pre-wired with a commando plug and socket. Need it in a hurry? Same or next day nationwide delivery, or instant collection.

3 hours emergency**IP65****-30°C to 50°C****50W max**

Pre-wired commando plug & socket!

Specification

Input volt	AC100~277V ≤7A 50/60Hz
Output volt	DC50~180V
Size	L285 x W90 x H50 mm
Emergency power	50W max
Emergency time	180 mins
Battery charge	24hr (full charge)
Input cable	1.2 metre length, 3 × 1.5mm ²
Output cable	0.5 metre length, 2 × 1.5mm ²
Ta	-30~50°C
Tc	Max 60°C
IP grade	IP65
Certificate	CE

Emergency function

- Output voltage of 175V when emergency function starts
- LED brightness will be decreased 70% when emergency function starts
- Emergency power is 50W maximum
- When charging, indicator light will be green if charged more than 90%, less than 90% will be red
- Press button on/off to check remaining capacity, indicator light flashing in:

Flashes

Remaining capacity

1 time	0-20% electricity
2 times	20-40%
3 times	40-60%
4 times	60-80%
5 times	above 80%

- Press button on/off in 3 seconds to stop emergency function