



50W / 100W / 200W / 400W

LED flood light

120 lm/W

IP65

50W / 100W / 200W / 400W

LED flood light




Product features

Integrated cooling design, elegant, efficient, ADC12 aluminium body, excellent heat treatment, private design of the PC lens, its luminous efficiency up to 95%.

Using ventilation plug release the air inside of the lamp to ensure excellent waterproof performance as well to discharge any moisture arise inside of the light.

LED FLOOD LIGHT

Specification features

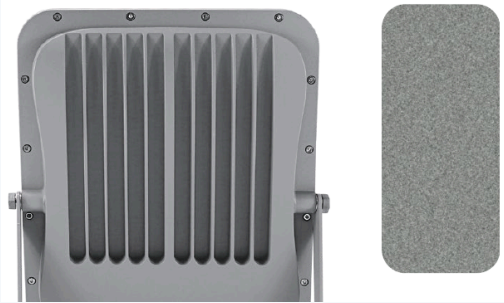

Professional outdoor AKESU powder
Corrosion and rusting resistance

 **LUMILEDS**

Brand lamp beads
High brightness LED chip



Creative design

Innovative design, more beautiful appearance
Excellent heat dissipation performance

350° rotation

Do not need to disassemble the bracket when
installation



LED FLOOD LIGHT

50W specifications

Electrical data


Wattage	50W
Voltage	AC100-277V
LED	80pcs SMD2835
Wire	H05RN-F 3G1.0mm ² cable

Optical data

Colour temperature	2700 ~ 6500K
Lumen	120 lm/W
Detection angle	90°
RA	>80
PF	>0.9

Others

IK	08
Material	ADC#12 aluminium
Waterproof	IP65
Size	228 × 205 × 29mm
Warranty	3 years

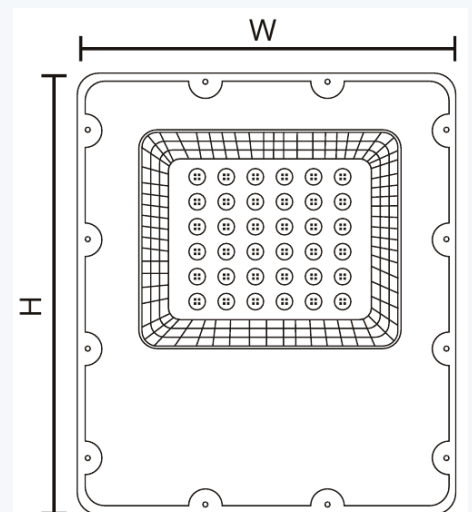

LED FLOOD LIGHT

100W specifications

Electrical data


Wattage	100W
Voltage	AC100-277V
LED	144pcs SMD2835
Wire	H05RN-F 3G1.0mm ² cable

Optical data

Colour temperature	2700 ~ 6500K
Lumen	120 lm/W
Detection angle	90°
RA	>80
PF	>0.9

Others

IK	08
Material	ADC#12 aluminium
Waterproof	IP65
Size	284 × 253 × 31mm
Warranty	3 years

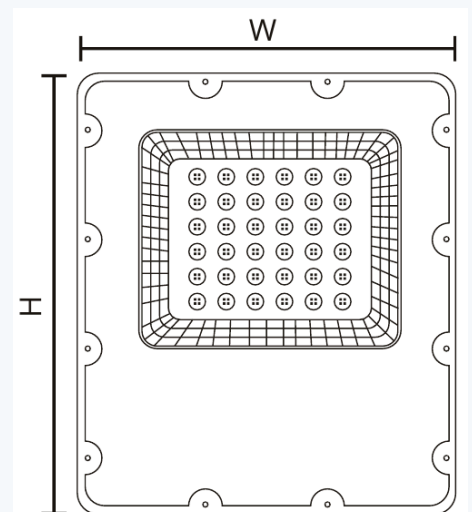

LED FLOOD LIGHT

200W specifications

Electrical data


Wattage	200W
Voltage	AC100-277V
LED	256pcs SMD2835
Wire	H05RN-F 3G1.0mm ² cable

Optical data

Colour temperature	2700 ~ 6500K
Lumen	120 lm/W
Detection angle	90°
RA	>80
PF	>0.9

Others

IK	08
Material	ADC#12 aluminium
Waterproof	IP65
Size	338 × 297 × 33mm
Warranty	3 years

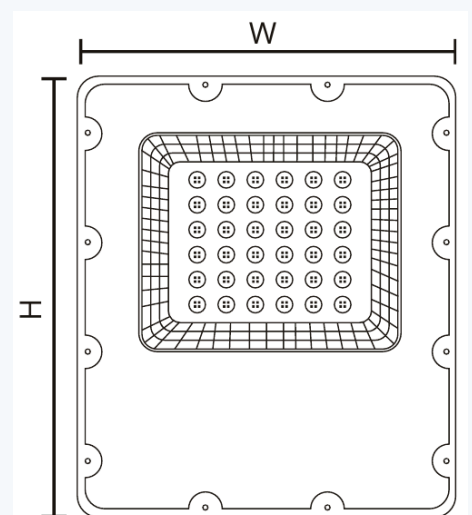

LED FLOOD LIGHT

400W specifications

Electrical data

Wattage	400W
Voltage	AC100-277V
LED	506pcs SMD2835
Wire	H05RN-F 3G1.0mm ² cable

Optical data

Colour temperature	2700 ~ 6500K
Lumen	120 lm/W
Detection angle	90°
RA	>80
PF	>0.9

Others

IK	08
Material	ADC#12 aluminium
Waterproof	IP65
Size	493.8 × 399.8 × 41.4mm
Warranty	3 years

